

## Full-circle protective cage

### Fact:

Grating, H3 20 x 2 mm, with 60 mm edge bar all round.  
The grating is delivered in sections, approx. 1000 mm wide.  
The door can be hung to the right or to the left.  
The cage is ready for any vertical addition.

### External radius of the cage:

Radius of the staircase + 110 mm.

### Surface treatment:

Hot dipped galvanised according to SS-EN-ISO 1461.


### Lock:

ASSA 565, latch bolt lock included. (Also ready for hook lock).

Door push on both sides.

Knob on the inside.

Cover on the outside (can be changed to cylinder).

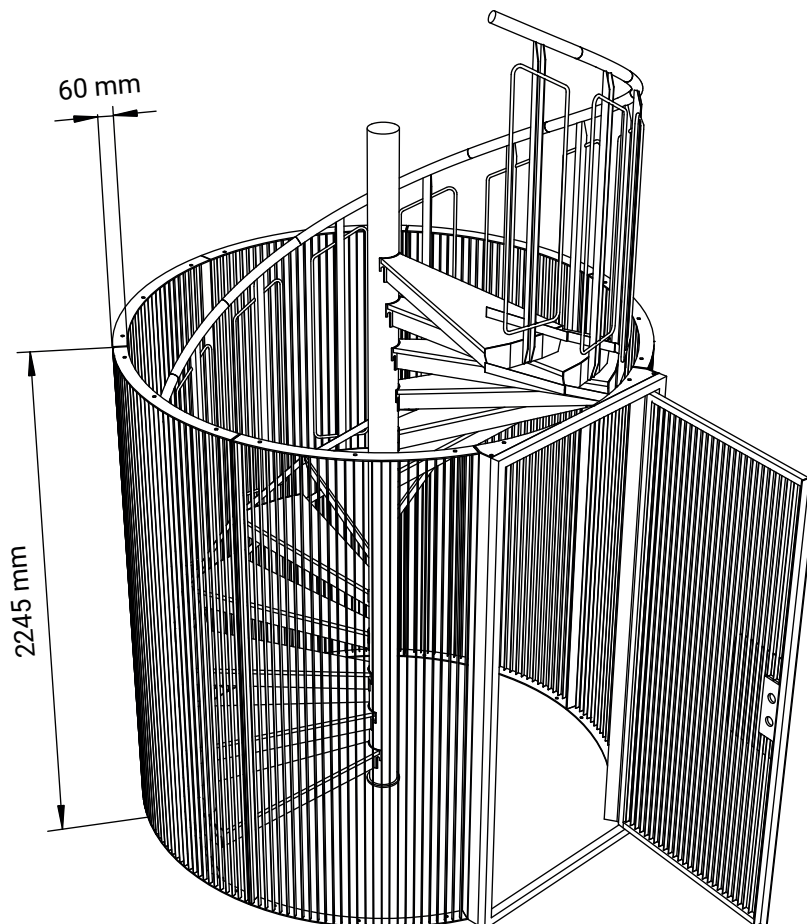

e4-24238-1