

## Protective cage and stair enclosure

### Fact:

Columns 80 x 80 mm, Rings 60 x 30 mm.

The door can be hung to the right or to the left.

Suggested suitable materials for cladding the cage frame are grating or perforated plate.

### External radius of the cage:

Radius of the staircase + 130 mm.

### Surface treatment:

Hot dipped galvanised according to SS-EN-ISO 1461.


### Lock:

ASSA 565, latch bolt lock included. (Also ready for hook lock).

Door push on both sides.

Knob on the inside.

Cover on the outside (can be changed to cylinder).

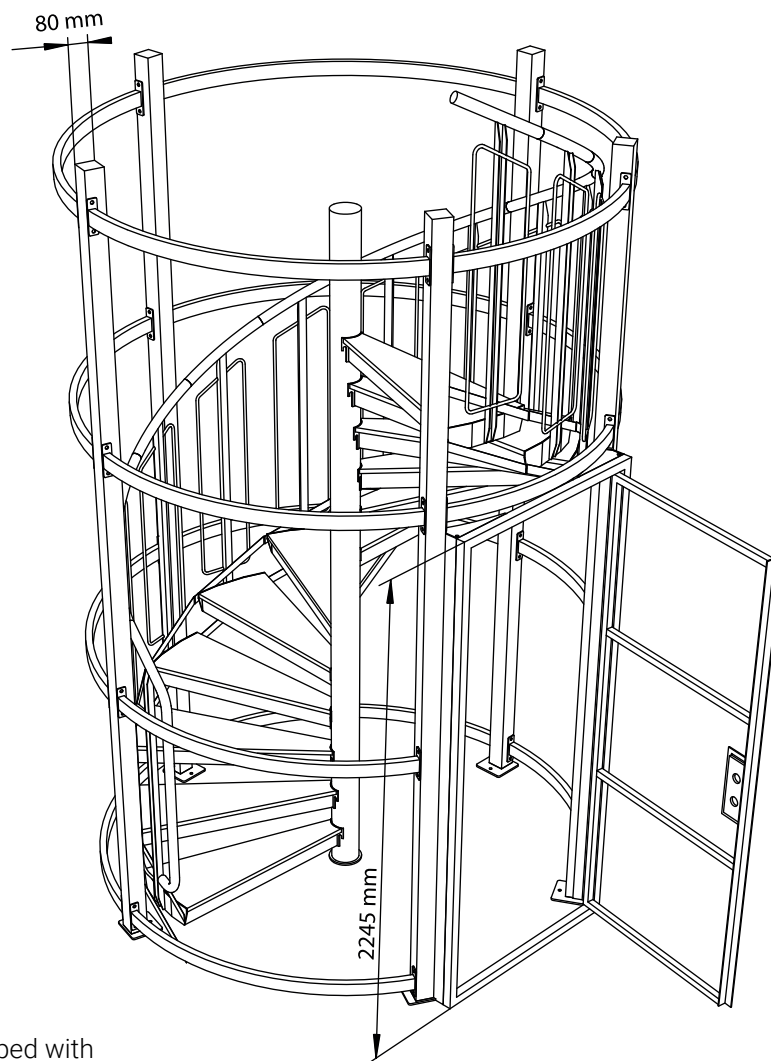

\* Can also be equipped with lock ASSA 410, ASSA 722 and ASSA 732.

e4-24381-1